

S CUT 55/P

FULL SERVICE WORKSHOP, STARTER PRODUCTION UNITS
STAND TYPE CUTTING MACHINE

KEY FEATURES

Versatile, slotted blade for high performance with minimal smoke


Ergonomic and functional design

Double foot pedal system

Safety cover and feeding guides for hose (easy and fast cutting operation)

Digital counter for maintenance assistance

Adjustable speed for cutting on pneumatic version

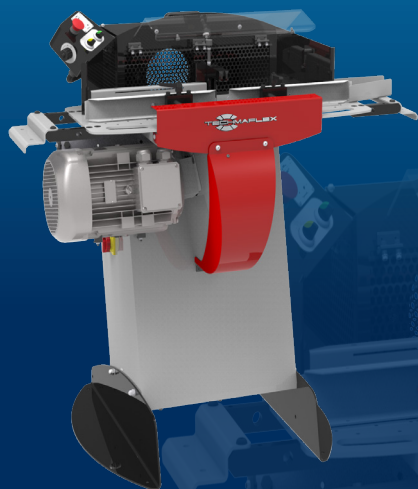

STANDARD



Control Panel



Slotted Blade



Feeding Guide



Dust Collector

TECHNICAL SPECIFICATIONS

CAPACITY

2wb: 2" max.

4ws: 2" max.

6ws: 2" max.

Industrial: 2"

ROTATION SPEED

3000 rpm

SLOTTED BLADE DIAMETER

400 mm (15.7")

MAX HOSE OD.

80 mm (3.15")

MOTOR

7.5 kW

VOLTAGES

220/240 V, 3Ph, 50 Hz

380/415 V, 3Ph, 50 Hz

208/240 V, 3Ph, 60 Hz

380/415 V, 3Ph, 60 Hz

DIMENSIONS

1140 x 1000 x 1280 mm

(45 x 39 x 50")

PACKAGING

1600 x 1200 x 1600 mm

NET WEIGHT

240 kg (529 lb)

GROSS WEIGHT

280 kg (617 lb)

TECHNICAL FEATURES

Diameter of the suction connection: 150 mm (6")

Options: Pneumatic bending system, scalloped blade

OPTIONAL




Cutting Rail



Decoiler



DV 32



Smoke suction



Smoke extractor