

P CRIMP 200

ASSEMBLING FOR MASS PRODUCTION
STAND TYPE CRIMP MACHINE, SCS SYSTEM



KEY FEATURES

- Safe Crimp System (SCS) control
- Large production capacity (small/medium bore)
- Low noise level
- Precise
- Robust
- Available with SCE control panel

STANDARD



Quick Change Gun

SCS Safe Crimp System

Mirror

Electrical Footswitch


Die Storage

TECHNICAL SPECIFICATIONS

CAPACITY*	NOISE LEVEL
Industrial: 2" max.	<55 dB A
4ws: 1 1/2" max.	MOTOR
CRIMP RANGE	5.5 kW
4 - 70 mm (0.157 - 2.756")	VOLTAGES
CRIMP FORCE	220/240 V, 3Ph, 50 Hz
200 t	380/415 V, 3Ph, 50 Hz
OPENING WITH DIES	208/240 V, 3Ph, 60 Hz
+51 mm (+2")	DIMENSIONS
COMPLETE OPENING	890 x 690 x 1380 mm
131 mm (5.157")	(35 x 27 x 54")
MASTER DIE LENGTH	PACKAGING
95 mm (3.740")	1120 x 1020 x 1725 mm
STANDARD DIES	(44 x 40 x 68")
14, 16, 18, 20, 22, 24, 27, 30, 33, 36, 39, 42, 45, 48	NET WEIGHT
	600 kg (1323 lb)

*Indicative capacities depending on hose and fitting type

OPTIONAL

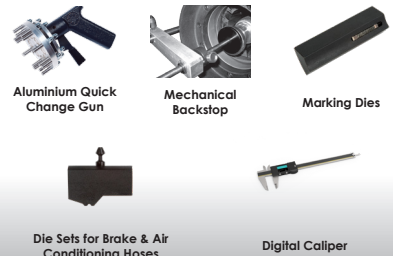

Aluminium Quick Change Gun

Mechanical Backstop

Marking Dies

Die Sets for Brake & Air Conditioning Hoses

Digital Caliper