


P CRIMP 320

ASSEMBLING FOR MASS PRODUCTION
STAND TYPE CRIMP MACHINE

KEY FEATURES

- High crimp force
- Large opening
- Safe Crimp System (SCS) control
- Wide family of dies for industrial hoses
- Robust structure
- Fast and ergonomic
- Low noise level

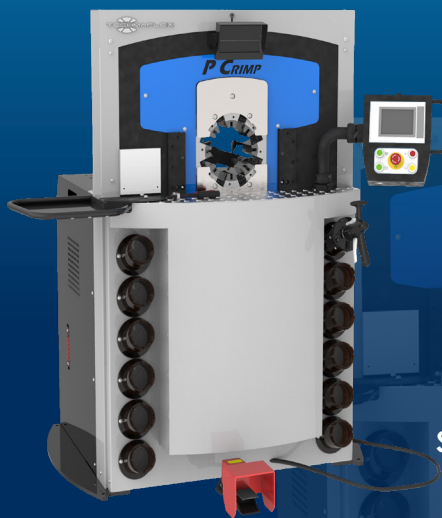

STANDARD



Quick Change Gun

SCS Safe Crimp System

Mirror

Electrical Footswitch

Die Storage

TECHNICAL SPECIFICATIONS

CAPACITY*	NOISE LEVEL
2wb: 3" max.	<65 dB A
4ws: 2" max.	MOTOR
6ws: 2" max.	5.5 kW / 7.5 kW (Fast Version)
Textile & Suction Hose: 4" max.	VOLTAGES
CRIMP RANGE	220/240 V, 3Ph, 50 Hz
4 - 130 mm (0.157 - 5.118")	380/415 V, 3Ph, 50 Hz
CRIMP FORCE	208/240 V, 3Ph, 60 Hz
320 t	380/415 V, 3Ph, 60 Hz
OPENING WITH DIES	DIMENSIONS
+80 mm (+3.149")	1240 x 995 x 1615 mm
COMPLETE OPENING	(49 x 39 x 64")
207 mm (8.149")	PACKAGING
MASTER DIE LENGTH	1400 x 1100 x 1960 mm
100 mm (3.937")	(55 x 43 x 77")
STANDARD DIES	NET WEIGHT
14, 16, 18, 20, 22, 24, 27, 30, 33, 36, 39, 42, 45, 48, 54, 57, 63, 66, 70, 73, 76	2000 kg (4409 lb)
	GROSS WEIGHT
	2300 kg (5071 lb)

*Indicative capacities depending on hose and fitting type

OPTIONAL



Die Storage Panel

Marking Dies

Back View Camera

Aluminium Quick Change Gun

Mechanical Backstop

Side Table & Pushing Panel

Die Sets for Brake & Air Conditioning Hoses

Digital Calliper